


TOP LOCKS

Z-SERIES™

STANDARD TOLERANCES		
A	+0.000 -0.002	+0.00 -0.05
B	+0.000 -0.002	+0.00 -0.05
C	±0.01	±0.2
T	+0.000 -0.002	+0.00 -0.05
W	+0.0000 -0.0004	+0.00 -0.01
S1-2	±0.01	±0.2
	INCH	METRIC

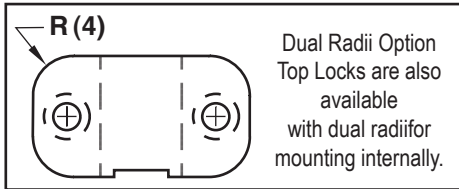


Male Insert

Material = H-13
Core = 42-48 HRC
Surface = 70 HRC
Treatment = Salt Bath Nitride

Female Insert

Material = D-2
Core = 58-62 HRC
Surface = 80 HRC
Treatment = Titanium Nitride Coated

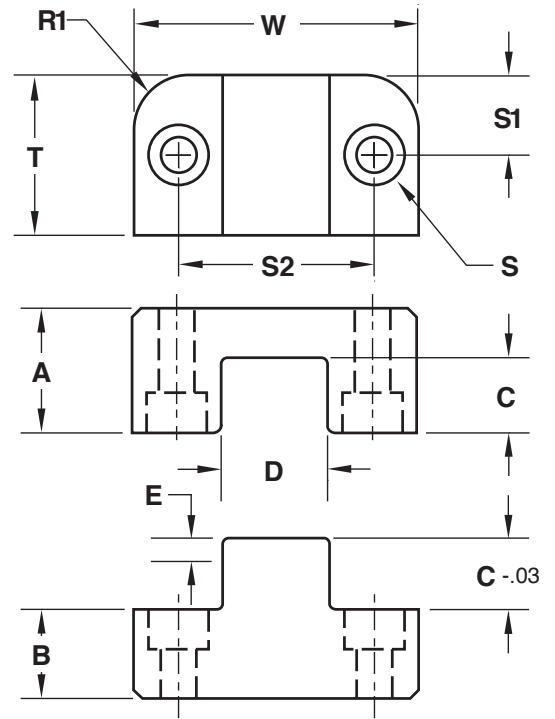

TOP LOCK			W	<input type="checkbox"/> Standard	+
Dimension	Tolerance				-
A	<input type="checkbox"/> Standard	+ -	R1	<input type="checkbox"/> To Suit	Pocket Radius (Lock machined to suit)
B	<input type="checkbox"/> Standard	+ -	E	<input type="checkbox"/> To Suit	Engagement Radius
C	<input type="checkbox"/> Standard	+ -	S	SHCS SIZE	
D	<input type="checkbox"/> Standard	.0001 - .0002 (.002 - .005 mm) Clearance per side			
T	<input type="checkbox"/> Standard	+ -			
Quantity:					

E-MAIL TECH@PROCOMPS.COM

CONTACT:	COMPANY NAME:	PHONE #:
REFERENCE #:	ACCOUNT #:	E-MAIL ADDRESS: