


UNILIFTER CORE BLADES: T-SHAPED

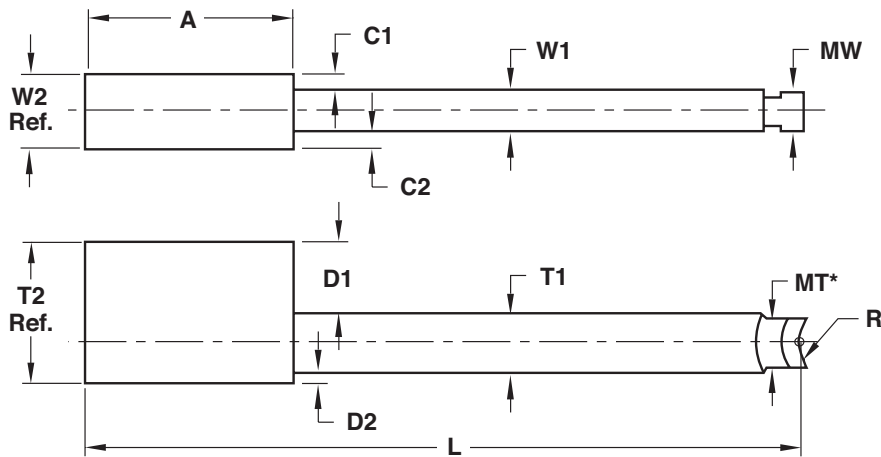

STANDARD TOLERANCES		
T1	+0.000 -0.001	+0.0 -0.025
W1	+0.000 -0.001	+0.0 -0.025
A	+0.020 -0.000	+0.5 -0.0
L	+0.020 -0.000	+0.5 -0.0
	INCH	METRIC

Series	R	MT*	MW
MiniLifter	.250	.31	.24
UniLifter	.406	.49	.49
XL Series	.875	1.00	1.00
Metric	10mm	15mm	10mm

*Note: MT may increase for strength.
 Note: Altering the MT & MW dimensions (Minimum Thickness and Width of heel area) is not recommended.

Series:

- MiniLifter
U-Coupling = UCM50
- UniLifter
U-Coupling = UCU87
- XL Series
U-Coupling = UCX175
- Metric
U-Coupling = UCMM22

Material:

- H-13
Hardness = 38-42 HRC
- Aluminum Bronze
Hardness = 30 HRC

CORE BLADES

Dimension		Tolerance		REF	
T1	<input type="checkbox"/> Standard	+	W2	REF	+
		-			
T2	REF				
D1		+	C2		+
		-			
D2		+	A	<input type="checkbox"/> Standard	+
		-			
W1	<input type="checkbox"/> Standard	+	L	<input type="checkbox"/> Standard	+
		-			
				Quantity:	

E-MAIL TECH@PROCOMPS.COM

CONTACT:	COMPANY NAME:	PHONE #:
REFERENCE #:	ACCOUNT #:	E-MAIL ADDRESS: