




BLADE EJECTORS

STANDARD TOLERANCES		
X	+0.0000	+0.000
	-0.0005	-0.015
Y	+0.0000	+0.000
	-0.0005	-0.015
D	+0.000	+0.00
	-0.001	-0.02
L	+0.04	+1.0
	-0.00	-0.0
M	+0.04	+1.0
	+0.08	+2.0
H	+0.000	+0.0
	-0.010	-0.2
T	+0.000	+0.00
	-0.002	-0.05
	INCH	METRIC

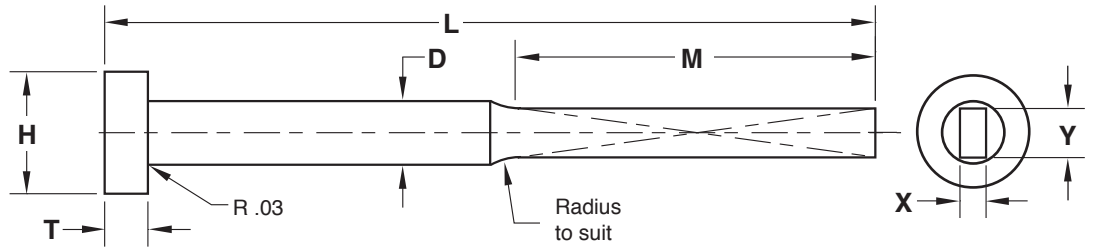

Material
O-1
58-62 HRC Thru Hardened

BLADE #1			
Dimension		Tolerance	
X	<input type="checkbox"/> Standard	+	
		-	
Y	<input type="checkbox"/> Standard	+	
		-	
D	<input type="checkbox"/> Standard	+	
		-	
L	<input type="checkbox"/> Standard	+	
		-	
M	<input type="checkbox"/> Standard	+	
		-	
H	<input type="checkbox"/> Standard	+	
		-	
T	<input type="checkbox"/> Standard	+	
		-	
Quantity:			

BLADE #2			
Dimension		Tolerance	
X	<input type="checkbox"/> Standard	+	
		-	
Y	<input type="checkbox"/> Standard	+	
		-	
D	<input type="checkbox"/> Standard	+	
		-	
L	<input type="checkbox"/> Standard	+	
		-	
M	<input type="checkbox"/> Standard	+	
		-	
H	<input type="checkbox"/> Standard	+	
		-	
T	<input type="checkbox"/> Standard	+	
		-	
Quantity:			

E-MAIL TECH@PROCOMPS.COM		
CONTACT:	COMPANY NAME:	PHONE #:
REFERENCE #:	ACCOUNT #:	E-MAIL ADDRESS: