




# BLADE EJECTORS

STANDARD TOLERANCES		
X	+0.0000 -0.0005	+0.000 -0.015
Y	+0.0000 -0.0005	+0.000 -0.015
D	+0.000 -0.001	+0.00 -0.02
L	+0.04 -0.00	+1.0 -0.0
M	+0.04 +0.08	+1.0 +2.0
H	+0.000 -0.010	+0.0 -0.2
T	+0.000 -0.002	+0.00 -0.05
K	+0.000 -0.002	+0.00 -0.05
	INCH	METRIC

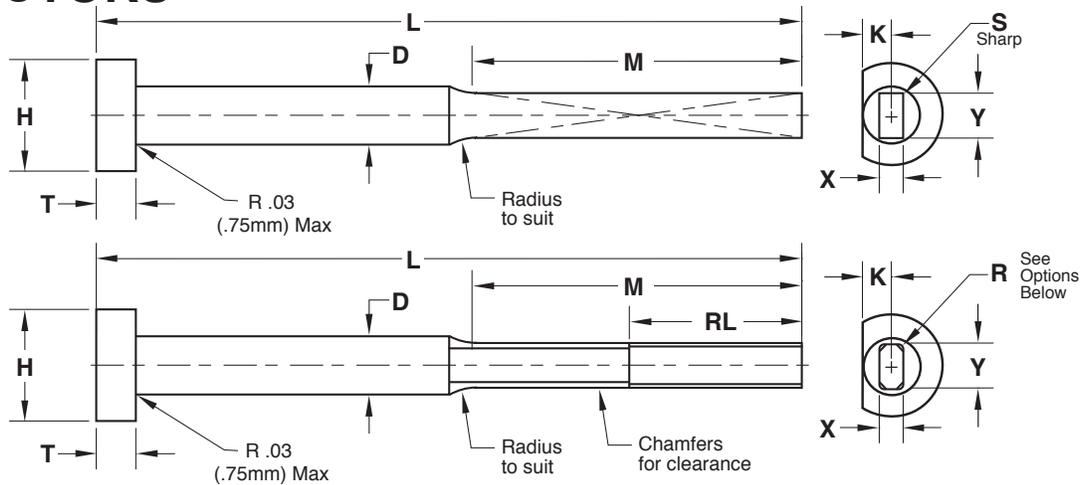

**Material:**


- O-1 58-62 HRC (Thru Hard)  
  H-13 48-52 HRC (Thru Hard)  
  M-2 58-62 HRC (Thru Hard)

**Treatment:**

- Black Nitride (M-2 Only, min X/Y=.06"/1.5mm)  
 Nicklon

BLADE DIMENSIONS			
Dimension		Tolerance	
<b>X</b>		<input type="checkbox"/> Standard	+
			-
<b>Y</b>		<input type="checkbox"/> Standard	+
			-
<b>D</b>		<input type="checkbox"/> Standard	+
			-
<b>L</b>		<input type="checkbox"/> Standard <input type="checkbox"/> Finished Length (+.001/- .000 or +.025mm/-0)	+
			-
<b>M</b>		<input type="checkbox"/> Standard	+
			-
<b>H</b>		<input type="checkbox"/> Standard	+
			-
<b>T</b>		<input type="checkbox"/> Standard	+
			-
<b>K</b>	From Center	<input type="checkbox"/> Tangent to Diameter (Will be parallel to Y dim.)	(Optional)
<b>Quantity:</b>			

CORNER SPECIFICATIONS			
Dimension		Min/Max Specifications & Tolerances	
<b>S</b>	<input type="checkbox"/> Sharp		
<b>2R</b>		2 Corner Radii (.01"/.25mm minimum)	± .0005
		<input type="checkbox"/> Horizontal <input type="checkbox"/> Vertical	
<b>4R</b>		4 Corner Radii (.01"/.25mm minimum)	± .0005
<b>RL</b>		Radius Length (2"/50mm maximum)	+ .125 - .000
		Chamfers for clearance will be +.005"/.13mm larger than the 2 or 4 radii specified.)	

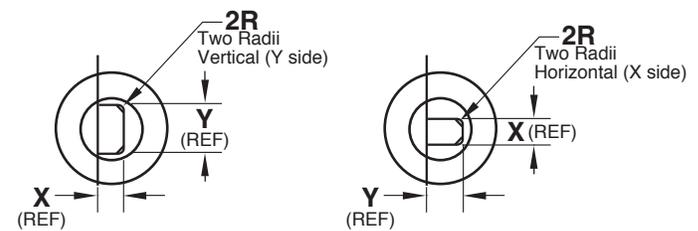

**Engraving**  
(Specify up to 4 digits)

<b>E-MAIL TECH@PROCOMPS.COM</b>		
CONTACT:	COMPANY NAME:	PHONE #:
REFERENCE #:	ACCOUNT #:	E-MAIL ADDRESS: