




EJECTOR SLEEVES

STRAIGHT

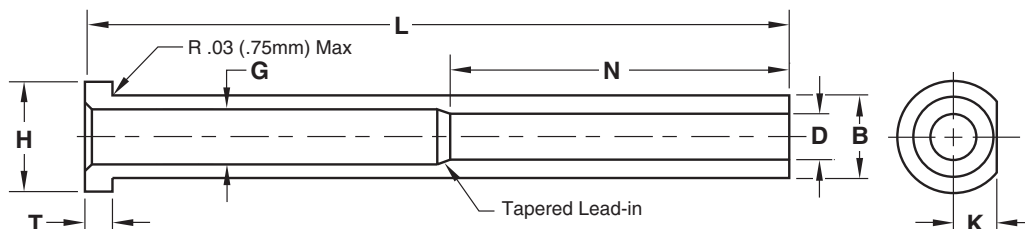

Material:

☐ H-13

Core = 40-45 HRC

Surface = Nitrided ID/OD

☐ M-2

Core = 58-62 HRC (Thru Hard)

Treatment (ID/OD):

☐ Chrome

☐ Black Nitride (H-13 Only)

☐ Nicklon

☐ Other:

Material	Core Hardness	Surface Hardness	Treatment

STANDARD TOLERANCES		
D	+0.0003 -0.0000	+0.007 -0.000
B	-0.0004 -0.0007	-0.01 -0.02
G	±0.015	±0.3
L	+0.030 -0.000	+1.0 -0.0
N	+0.20 -0.00	+5.0 -0.0
H	+0.000 -0.010	+0.0 -0.2
T	+0.000 -0.002	+0.00 -0.05
K	+0.000 -0.002	+0.00 -0.05
	INCH	METRIC

Note: Nitriding ID/OD and Black Nitride may not be applicable on all sizes or may require tolerance adjustment. Progressive will verify when quoting.

SLEEVE #1			
Dimension		Tolerance	
D	☐ Standard	+	
		-	
B	☐ Standard	+	
		-	
G	☐ Standard	+	
		-	
L	☐ Standard ☐ Finished Length (+.001/-0.000)	+	
		-	
N	☐ Standard	+	
		-	
H	☐ Standard	+	
		-	
T	☐ Standard	+	
		-	
K	☐ Standard	+	
		-	
Quantity:			

SLEEVE #2			
Dimension		Tolerance	
D	☐ Standard	+	
		-	
B	☐ Standard	+	
		-	
G	☐ Standard	+	
		-	
L	☐ Standard ☐ Finished Length (+.001/-0.000)	+	
		-	
N	☐ Standard	+	
		-	
H	☐ Standard	+	
		-	
T	☐ Standard	+	
		-	
K	☐ Standard	+	
		-	
Quantity:			

E-MAIL TECH@PROCOMPS.COM

CONTACT:	COMPANY NAME:	PHONE #:
REFERENCE #:	ACCOUNT #:	E-MAIL ADDRESS:

PROGRESSIVE
COMPONENTS