
VENT PINS
STRAIGHT

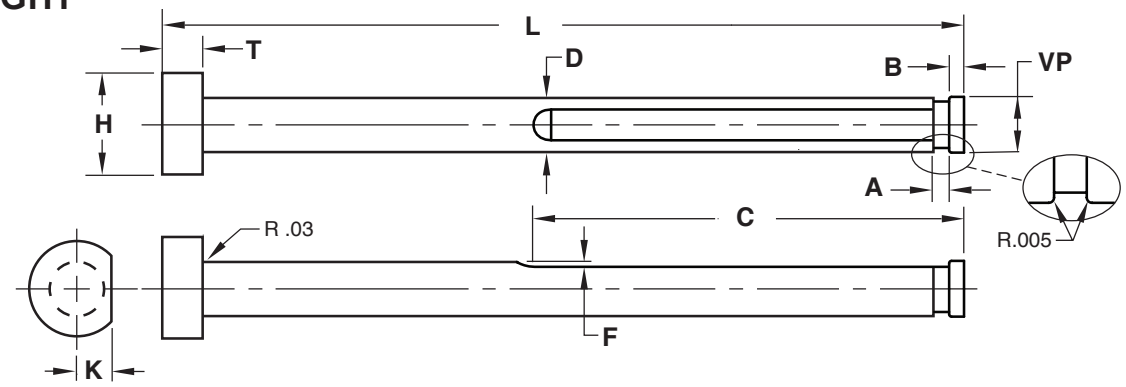

STANDARD TOLERANCES		
D	-0.0004 -0.0007	g6
A	+0.015 -0.005	+0.38 -0.12
B	+0.005 -0.000	+.12 -.00
C	±.06	±1.5
F	+0.003 -0.000	+.07 -.00
T	+0.000 -0.002	+0.00 -0.05
H	+0.000 -0.010	+0.0 -0.2
L	+0.001 -0.000	+.02 -.00
K	+0.000 -0.002	+0.00 -0.05
	INCH	METRIC

Material:

☐ Material = H-13
Core = 48-50 HRC
Surface = 65-70 HRC

☐ Material = M-2
60-64 HRC

☐ Material = 440C
56-60 HRC

Treatment:

☐ Black Nitride (H-13/M-2 Only)

☐ **Other:**

Material	Core Hardness	Surface Hardness	Treatment

Note: Black Nitride may not be applicable on all sizes or may require tolerance adjustment. Progressive will verify when quoting.

Dimension		Tolerance	
D		☐ Standard	+
			-
H		☐ Standard	+
			-
T		☐ Standard	+
			-
L		☐ Standard	+
			-
K		☐ Standard	+
			-
A		☐ Standard	+
			-
B		☐ Standard	+
			-
VP	Check the standard dim/tol at right or specify dimension below and tolerance at right.	☐ **D** -.0004/-.0007 ☐ **D** -.0010 ±.0001	+
		☐ **D** -.0015 ±.0001 ☐ **D** -.0020 ±.0001	-

Dimension		Tolerance	
C		☐ Standard	+
			-
F		☐ Standard	+
			-

F Standard Depths	
Pin Diameter (Inch)	Depth
.062-.078	.008"
.094-.109	.009"
.125-.156	.010"
.172-.250	.012"
.250+	.015"
Equivalent sizes for metric pins.	

Engraving: Specify markings required on head. (Max 4 characters.)	
Quantity:	

E-MAIL TECH@PROCOMPS.COM		
CONTACT:	COMPANY NAME:	PHONE #:
REFERENCE #:	ACCOUNT #:	E-MAIL ADDRESS:

PROGRESSIVE COMPONENTS