




BAR LOCKS Z-SERIES™

Male Insert

Material = H-13
Core = 42-48 HRC
Surface = 70 HRC
Treatment = Salt Bath Nitride

Female Insert

Material = D-2
Core = 58-62 HRC
Surface = 80 HRC
Treatment = Titanium Nitride Coated

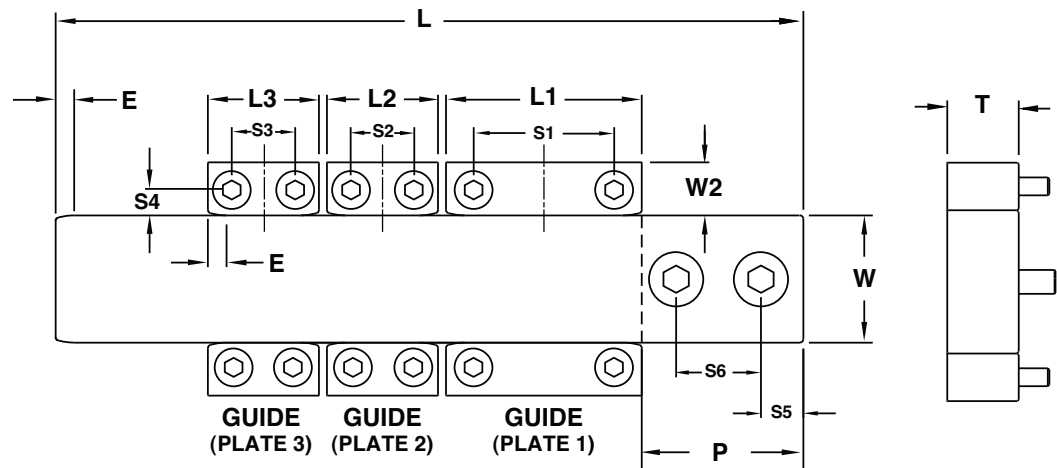

Quantity

BAR						
L	T	W	S5	S6	E	P
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

STANDARD TOLERANCES		
L-L3	+0.000 -0.005	+0.00 -0.15
T	+0.000 -0.005	+0.00 -0.15
W-W2	+0.0000 -0.0003	+0.0000 -0.007
S1-S6	±0.005	±0.1
	INCH	METRIC

GUIDE 1				
L1	T	W2	S1	S4
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

Note: The "T" dimension will be equal for male and all guides.

Progressive will determine the lead-in radius, SHCS size, and center spacing.

GUIDE 2				
L2	T	W2	S2	S4
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

Bars sold individually. Guides sold in pairs.

SHCS not included for non-standard T Dimensions.

GUIDE 3				
L3	T	W2	S3	S4
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

T	SHCS	SHCS
	GUIDES	BAR
1.000	#10 - 32 X 1.25	5/16 - 18 X 1.25
1.250	1/4 - 20 X 1.50	3/8 - 16 X 1.50
1.370	5/16 - 18 X 1.50	3/8 - 16 X 1.50
1.500	3/8 - 16 X 1.75	1/2 - 13 X 1.75

E-MAIL TECH@PROCOMPS.COM

CONTACT:	COMPANY NAME:	PHONE #:
REFERENCE #:	ACCOUNT #:	E-MAIL ADDRESS: