




# PINS: KEYED & SPECIAL LENGTHS



Standard Inch, DIN, or JIS Ejector Pins (Straight or Shoulder style) can be provided cut to your specific length and/or keyed for maintaining positioning during production.

## KEYED PINS


To order pins with the flat machined on the head a specific distance from the center of the pin, specify the catalog number and the specific distance after the "K" designation for the flat as shown below.



Examples:

- EP437L10-K250 for a 7/16 diameter Ejector Pin with a flat 1/4" from center
- EPD10L200-K6 for a 10mm diameter DIN pin with a flat 6mm from center
- EPJ055L250-K4 for a 5.5mm diameter JIS pin with a flat 4mm from center

Flat will be ground tangent if -K is specified without a dimension.




Example:

- CP125L6-K for a 1/8" diameter Core Pin with a flat ground tangent to the pin diameter

## CUT-TO-LENGTH PINS

To order Pins cut to your specified length, +.001/-.000 (+.025/-.000mm), with or without keyed heads, specify the length required after the standard Ejector Pin catalog number.

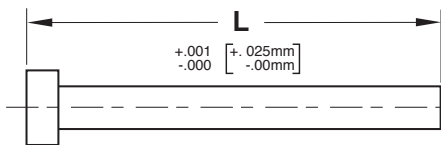

Examples:

- EP437L6.25-K250 for a 7/16" diameter pin x 6.25" long with a flat 1/4" from center
- EPD10L225.5 for a 10mm diameter x 225.5mm long DIN pin

