




EJECTOR SLEEVES

STEPPED

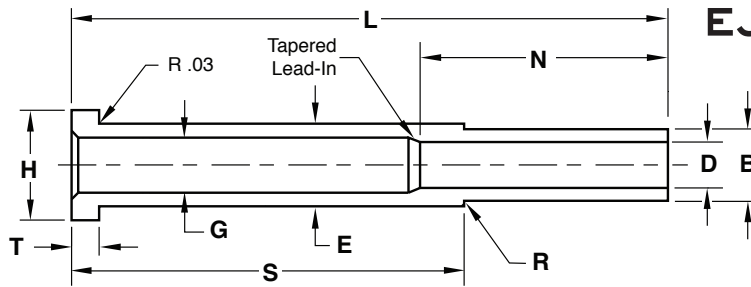

STANDARD TOLERANCES		
D	+0.0003 -0.0000	+0.007 -0.000
B	-0.0004 -0.0007	-0.01 -0.02
E	+0.000 -0.001	+0.00 -0.02
G	±0.015	±0.4
L	+0.030 -0.000	+1.0 -0.0
N	+0.20 -0.00	+5.0 -0.0
S	±0.01	±0.2
H	+0.000 -0.010	+0.00 -0.20
T	+0.000 -0.002	+0.00 -0.05
	INCH	METRIC

Material:

- H-13** Core = 40-45 HRC Treatment = Nitrided ID/OD
 A-2 Core = 58-60 HRC Treatment = Nicklon®
 M-2 Core = 58-62 HRC

Other:

Material	Core Hardness	Surface Hardness	Treatment

SLEEVE #1			
Dimension		Tolerance	
D		<input type="checkbox"/> Standard	+
			-
B		<input type="checkbox"/> Standard	+
			-
E		<input type="checkbox"/> Standard	+
			-
G		<input type="checkbox"/> Standard	+
			-
L		<input type="checkbox"/> Standard	+
			-
N		<input type="checkbox"/> Standard	+
			-
S		<input type="checkbox"/> Standard	+
			-
H		<input type="checkbox"/> Standard	+
			-
T		<input type="checkbox"/> Standard	+
			-
R		<input type="checkbox"/> To Suit	
Quantity:			

SLEEVE #2			
Dimension		Tolerance	
D		<input type="checkbox"/> Standard	+
			-
B		<input type="checkbox"/> Standard	+
			-
E		<input type="checkbox"/> Standard	+
			-
G		<input type="checkbox"/> Standard	+
			-
L		<input type="checkbox"/> Standard	+
			-
N		<input type="checkbox"/> Standard	+
			-
S		<input type="checkbox"/> Standard	+
			-
H		<input type="checkbox"/> Standard	+
			-
T		<input type="checkbox"/> Standard	+
			-
R		<input type="checkbox"/> To Suit	
Quantity:			

E-MAIL TECH@PROCOMPS.COM		
CONTACT:	COMPANY NAME:	PHONE #:
REFERENCE #:	ACCOUNT #:	E-MAIL ADDRESS: