

NEW PRODUCT *release*

Recently Released Components and Technology Solutions from Progressive Components


Q1 2020

CounterView®

B Side (Movable Half) / A Side (Stationary Half)

A new series of **CounterViews** now can be viewed from the operator side when mounted on the stationary half/A side of the mold.


CATALOG NUMBER B-SIDE	CATALOG NUMBER A-SIDE	DESCRIPTION
CVPL-B	CVPL-A	Parting Line
CVIN-B	CVIN-A	Internal Extension Mount

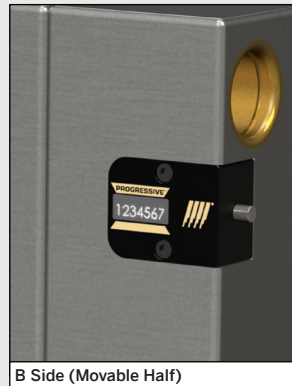

B Side (Movable Half)



A Side (Stationary Half)

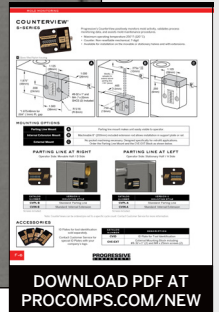


Insulator Block

CounterViews and CVe Monitors

Insulator Blocks protect Progressive's monitoring devices from temperatures found when molding high temperature resins. With an Insulator Block installed, the CVe Monitor and CounterView will perform at mold temps up to 180°C/360°F.

CATALOG NUMBER	DESCRIPTION
CV-BLK	Inch: Includes 1/4-20 Screws
CVMM-BLK	Metric: Includes M6 Screws

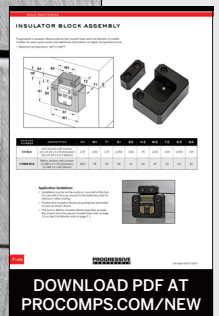

ProFile®

Asset Tracking and Maintenance

ProFile online asset management simplifies the organization of molds, dies, machines, and equipment. The cloud-based system houses information and related documents or photos, while also logging GPS locations. Several Asset Tag and Plate layouts are available, and tags and plates with your company logo and information can be ordered.

Call to receive info on this affordable system developed for the mold building and molding industry.

AST00094

General | Photos | Work Orders

Mold Information

Tool Owner: Craig Industries	Asset Class: Mold	Cavitation: 8
PRO ID: CRIIN	Designer: J. Jones	Starting Cycle Count: 1
Asset ID: 15-116768-001	Design Revision: C	Last Cycle Count: 161,868
Tool Builder: Acme Mold	Asset Type: Injection Mold	Cycles Until PM: 15,132
Purchased Loc: Chicago	Tool Type: Stripper Plate	Tonnage Required: 500.0
Location: Miami, FL	Tooling Cost: 100,000.00	Mold Weight: 9,000.0
Tool ID: T-0800		Target Efficiency: 95.0
Program Name: Raptor		Target Cycle Time: 35
Part No: F-22-0098		
Part Name: Battery Case		
Customer: Craig Industries		Counter/Monitor S/N: Q12953
Custom 1: 10000		
Custom 2: 50000		

Asset Photo:

Documents

PM

Production

Qualification

Map | Satellite | Filter

Google

Download PDF AT PROCOMPS.COM/NEW



Visit procomps.com for all current catalog pages and CAD geometry in seven formats.

SRT® Slide Retainers

Easy Installation

Machining is simplified with the introduction of a larger **SRT**. With a diameter of 1.125"/28mm, and two ¼-20 or M6 tapped holes, this Slide Retainer and an optional bushing (1.5"/37mm diameter) reliably holds 75 lbs/34 kg, with no friction or galling of the underside of slides.

CATALOG NUMBER-INCH	CATALOG NUMBER-METRIC
SRT-40 (Blue Spring)	SRTM-18 (Blue Spring)
SRT-60 (Red Spring)	SRTM-28 (Red Spring)
SRT-75 (Yellow Spring)	SRTM-34 (Yellow Spring)




CamAction™

250 Series

A new series of **CamActions** are now available with a smaller footprint and travel distances ranging from .15" to .50". Inserts are available in two different materials based on machining preferences.

CATALOG NUMBER-INCH	CATALOG NUMBER-METRIC
CA-250-15 (.15" Tr)	CAMM-250-4 (4mm Tr)
CA-250-31 (.31" Tr)	CAMM-250-8 (8mm Tr)
CA-250-50 (.50" Tr)	CAMM-250-12 (12mm Tr)

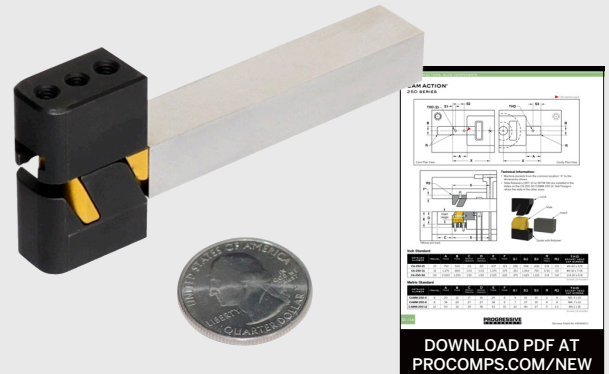


Z-Series™ Bar Locks

Additional Sizes

New sizes of **Bar Locks** expand designer options for aligning molds that have multiple plates or require longer engagement. Available in both inch and metric standards, the metric range now includes two guide bars and four different guides to choose from.

CATALOG NUMBER-BARS	CATALOG NUMBER-GUIDES
BLBM25L125	BLGM25L27 or L36
BLBM32L160	BLGM32L36 or L46
BLBM38L250	BLGM37L46 or L76

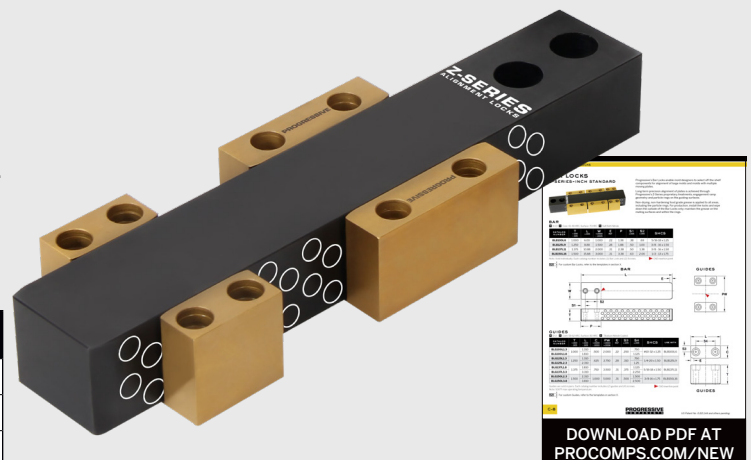


MiniLifter®

Easy Installation

MiniLifters, part of the UniLifter undercut release product line, are now available in a smaller series in metric nominal sizes. In addition, core blades are offered in two different materials to accommodate machining and heat treatment preferences.

CORE BLADE SIZES (MM)
6 x 6
6 x 10
8 x 6
8 x 8
10 x 8
8mm Diameter

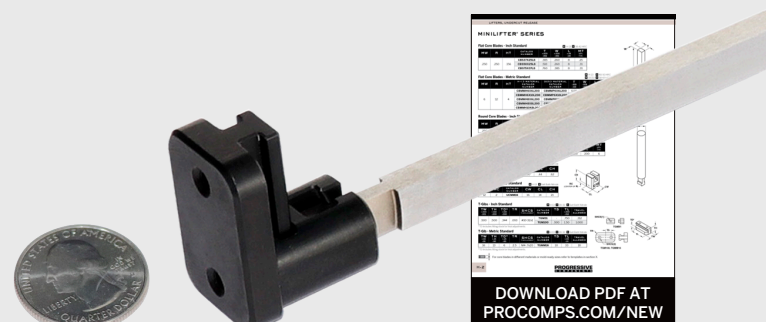

Visit procomps.com for all current catalog pages and CAD geometry in seven formats.