



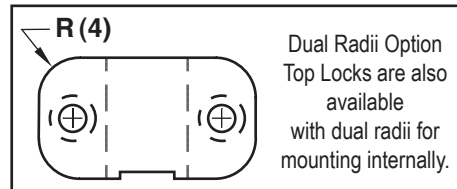

TOP LOCKS

Z-SERIES™

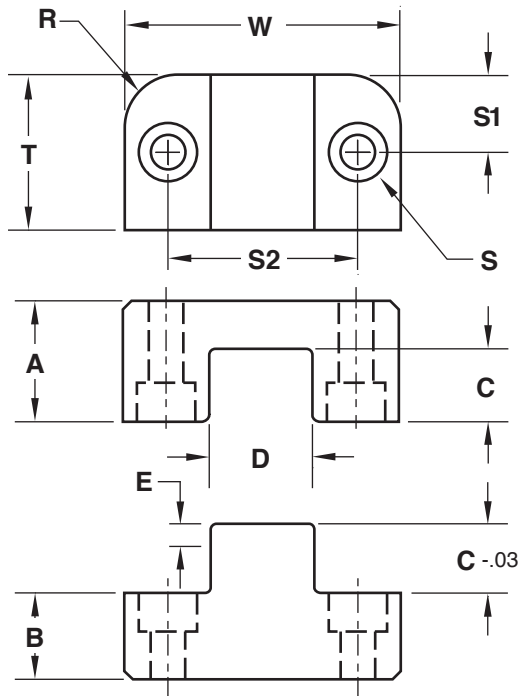

STANDARD TOLERANCES		
A	+0.000 -0.002	+0.00 -0.05
B	+0.000 -0.002	+0.00 -0.05
C	±0.01	±0.2
T	+0.000 -0.002	+0.00 -0.05
W	+0.0000 -0.0004	+0.00 -0.01
S1-2	±0.01	±0.2
	INCH	METRIC

Male Insert
 Material = H-13
 Core = 42-48 HRC
 Surface = 70 HRC
 Treatment = Salt Bath Nitride

Female Insert
 Material = D-2
 Core = 58-62 HRC
 Surface = 80 HRC
 Treatment = Titanium Nitride Coated

TOP LOCK				R	<input type="checkbox"/> To Suit	Pocket Radius (Lock machined to suit)
Dimension	Tolerance					
A	<input type="checkbox"/> Standard	+	-	DUAL RADII	<input type="checkbox"/> Yes <input type="checkbox"/> No	
B	<input type="checkbox"/> Standard	+	-			
C	<input type="checkbox"/> Standard	+	-	S		SHCS SIZE
D	<input type="checkbox"/> Standard	.0001-.0003 (.002-.008mm) Clearance per side				
T	<input type="checkbox"/> Standard	+	-	S2		
W	<input type="checkbox"/> Standard	+	-			
Quantity (Sets of 1M/1F):		Special Configs:		Qty Male:	Qty Female:	

E-MAIL TECH@PROCOMPS.COM

CONTACT:	COMPANY NAME:	PHONE #:
REFERENCE #:	ACCOUNT #:	E-MAIL ADDRESS: