




BAR LOCKS Z-SERIES™

Bars

Material = H-13
Core = 42-48 HRC
Surface = 70 HRC
Treatment = Salt Bath Nitride

Guides

Material = D-2
Core = 58-62 HRC
Surface = 80 HRC
Treatment = Titanium Nitride Coated

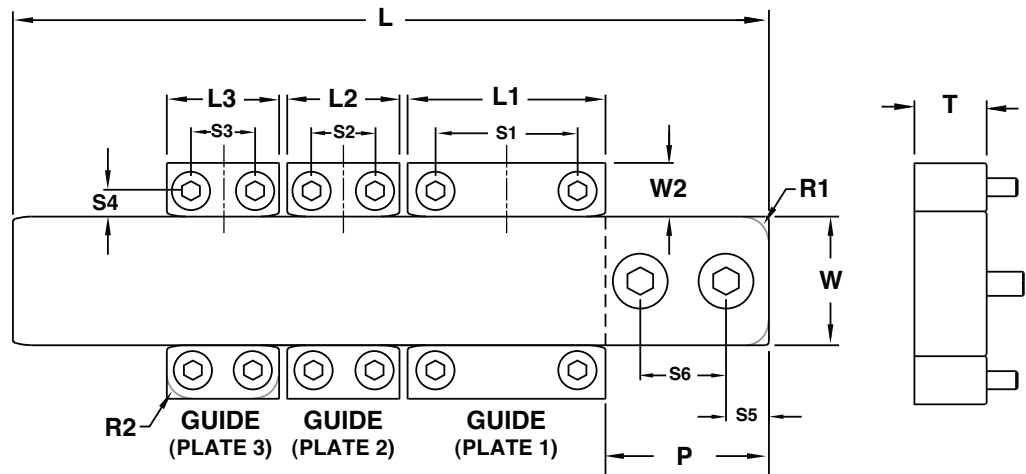

BAR		W	S5	S6	P	R1 (Optional)
L	T					
Quantity:						

STANDARD TOLERANCES		
L-L3	+0.000 -0.005	+0.00 -0.15
T	+0.000 -0.005	+0.00 -0.15
W-W2	+0.0000 -0.0003	+0.000 -0.007
S1-S6	±0.005	±0.1
	INCH	METRIC

GUIDE 1		W2	S1	S4	R2 (Optional)
L1	T				
Quantity:					

GUIDE 2		W2	S2	S4	R2 (Optional)
L2	T				
Quantity:					

GUIDE 3		W2	S3	S4	R2 (Optional)
L3	T				
Quantity:					

Note:

When ordering full sets of bars/guides, the "T" dimension should be equal on all items.

Progressive will determine the lead-in radius, SHCS size, and center spacing.

Bars sold individually.

Guides sold in pairs.

To order standard bars cut to length or bars/guides with pocket radii, please refer to page C-7.

E-MAIL TECH@PROCOMPS.COM

CONTACT:	COMPANY NAME:	PHONE #:
REFERENCE #:	ACCOUNT #:	E-MAIL ADDRESS: