


UNILIFTER™ CORE BLADES

STANDARD TOLERANCES		
T	+0.000 -0.001	+0.0 -0.025
W	+0.000 -0.001	+0.0 -0.025
L	+0.06 -0.00	+2.0 -0.0
	INCH	METRIC

Series	R	MT*	MW
MiniLifter	.250	.31	.24
UniLifter	.406	.49	.49
XL Series	.875	1.00	1.00
Metric	10mm	15mm	10mm
Metric Mini	12mm	6mm or T	6mm

*Note: MT may increase for strength.
 Note: Altering the MT & MW dimensions (Minimum Thickness and Width of heel area) is not recommended.

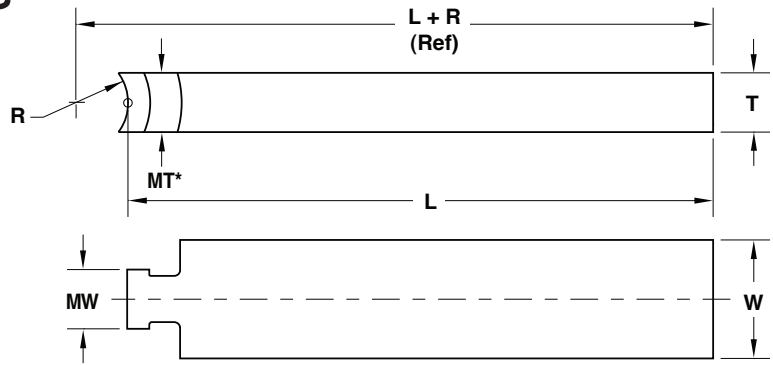

Series:

- MiniLifter**
U-Coupling = UCM50
- Metric MiniLifter**
U-Coupling = UCMM16
- Metric**
U-Coupling = UCMM22
- UniLifter**
U-Coupling = UCU87
- XL Series**
U-Coupling = UCX175

Material:

- H-13**
Hardness = 38-42 HRC
- H-13**
Hardness = 48-50 HRC
- Aluminum Bronze**
Hardness = 30 HRC
- S-7**
Hardness = 54-56 HRC
- DC53**
Hardness = 58-60 HRC

CORE BLADE #1			
Dimension	Tolerance		
T	<input type="checkbox"/> Standard	+	
		-	
W	<input type="checkbox"/> Standard	+	
		-	
L	<input type="checkbox"/> Standard	+	
		-	
Quantity:			

CORE BLADE #2			
Dimension	Tolerance		
T	<input type="checkbox"/> Standard	+	
		-	
W	<input type="checkbox"/> Standard	+	
		-	
L	<input type="checkbox"/> Standard	+	
		-	
Quantity:			

CORE BLADE #3			
Dimension	Tolerance		
T	<input type="checkbox"/> Standard	+	
		-	
W	<input type="checkbox"/> Standard	+	
		-	
L	<input type="checkbox"/> Standard	+	
		-	
Quantity:			

CORE BLADE #4			
Dimension	Tolerance		
T	<input type="checkbox"/> Standard	+	
		-	
W	<input type="checkbox"/> Standard	+	
		-	
L	<input type="checkbox"/> Standard	+	
		-	
Quantity:			

E-MAIL TECH@PROCOMPS.COM		
CONTACT:	COMPANY NAME:	PHONE #:
REFERENCE #:	ACCOUNT #:	E-MAIL ADDRESS: