




EJECTOR SLEEVES

STRAIGHT

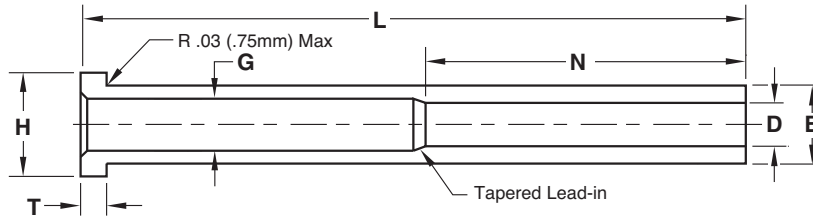

Material:

- H-13**
Core = 40-45 HRC
Surface = Nitrided ID/OD

- M-2**
Core = 58-62 HRC (Thru Hard)

Treatment (ID/OD):

- Chrome
- Black Nitride (H-13 Only)
- Nicklon

Other:

Material	Core Hardness	Surface Hardness	Treatment

STANDARD TOLERANCES		
D	+0.0003	+0.007
	-0.0000	-0.000
B	-0.0004	-0.01
	-0.0007	-0.02
G	±0.015	±0.3
L	+0.030	+1.0
	-0.000	-0.0
N	+0.20	+5.0
	-0.00	-0.0
H	+0.000	+0.0
	-0.010	-0.2
T	+0.000	+0.00
	-0.002	-0.05
	INCH	METRIC

Note: Nitriding ID/OD and Black Nitride may not be applicable on all sizes or may require tolerance adjustment. Progressive will verify when quoting.

SLEEVE #1			
Dimension	Tolerance		
D	<input type="checkbox"/> Standard	+	
		-	
B	<input type="checkbox"/> Standard	+	
		-	
G	<input type="checkbox"/> Standard	+	
		-	
L	<input type="checkbox"/> Standard <input type="checkbox"/> Finished Length (+.001/- .000)	+	
		-	
N	<input type="checkbox"/> Standard	+	
		-	
H	<input type="checkbox"/> Standard	+	
		-	
T	<input type="checkbox"/> Standard	+	
		-	
Quantity:			

SLEEVE #2			
Dimension	Tolerance		
D	<input type="checkbox"/> Standard	+	
		-	
B	<input type="checkbox"/> Standard	+	
		-	
G	<input type="checkbox"/> Standard	+	
		-	
L	<input type="checkbox"/> Standard <input type="checkbox"/> Finished Length (+.001/- .000)	+	
		-	
N	<input type="checkbox"/> Standard	+	
		-	
H	<input type="checkbox"/> Standard	+	
		-	
T	<input type="checkbox"/> Standard	+	
		-	
Quantity:			

E-MAIL TECH@PROCOMPS.COM

CONTACT:	COMPANY NAME:	PHONE #:
REFERENCE #:	ACCOUNT #:	E-MAIL ADDRESS: