


INSULATOR BLOCK ASSEMBLY

Progressive's Insulator Block protects the CounterView and CVe Monitor to enable moulders to view cycle counts and additional information on higher temperature tools.

- Maximum temperature: 180°C/360°F

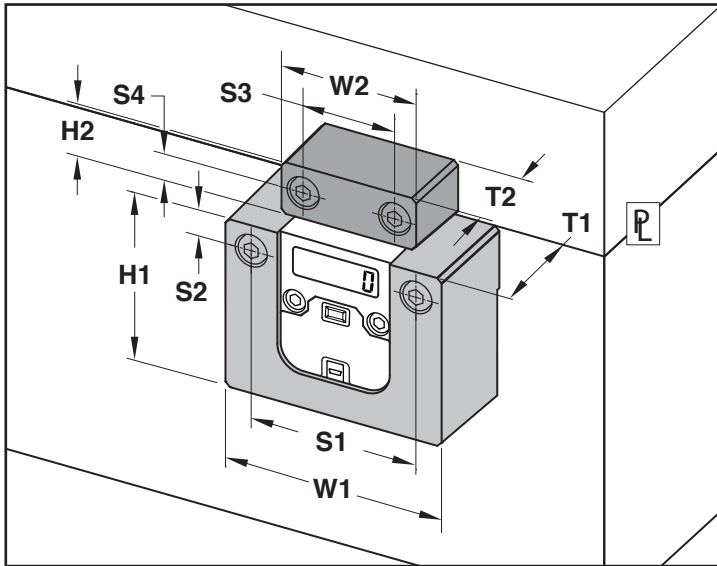

CATALOGUE NUMBER	DESCRIPTION	H1	W1	T1	S1	S2	H2	W2	T2	S3	S4
CV-BLK	Inch version with screws: (2) 1/4-20 x 1-1/8 (Actuator) (2) 1/4-20 x 1-1/2 (Block)	2.37	3.00	1.37	2.250	.500	.75	2.00	1.00	1.000	.375
CVMM-BLK	Metric version with screws: (2) M6-1.0 x 30 (Actuator) (2) M6-1.0 x 40 (Block)	58.5	78	35	58	13	20	47	25	23	10

Application Guidelines:

- Installation can be on the cavity or core half of the tool. For use with CVe Live, mount to the stationary half for optimum cable routing.
- Position the Insulator Blocks at parting line and install screws as shown above.
- The Inch or Metric Insulator Block assembly accepts the screws from the square CounterView sold on page A-10 or the CVe Monitor sold on page A-1.

