




# BAR LOCKS

## Bars

Material = H-13  
 Core = 42-48 HRC  
 Surface = 70 HRC  
 Treatment = Salt Bath Nitride  
 Sold individually.

## Guides

Material = D-2  
 Core = 58-62 HRC  
 Surface = 80 HRC  
 Treatment = Titanium Nitride Coated  
 Sold in pairs.

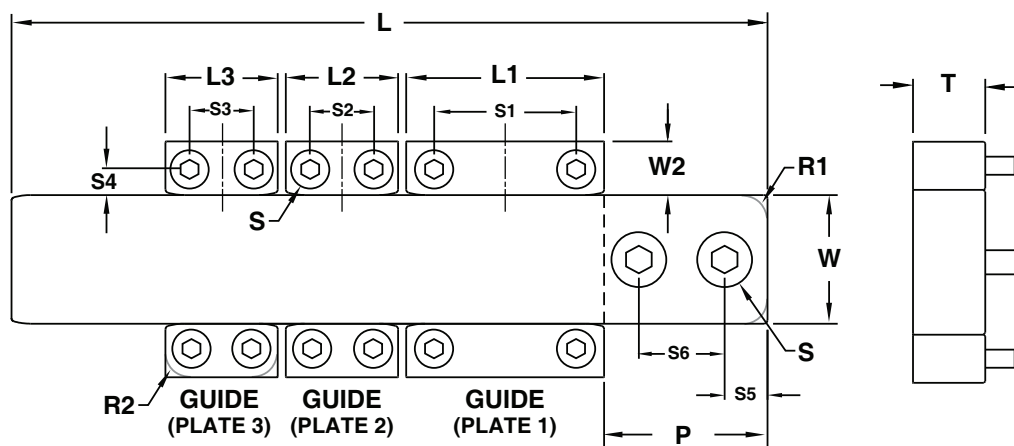

BAR		L	T	W	S5	S6	P	S (SHCS Size)	R1 (Optional)
Quantity:									

GUIDE #1		L1	T	W2	S1	S4	S (SHCS Size)	R2 (Optional)
Quantity:								

GUIDE #2		L2	T	W2	S2	S4	S (SHCS Size)	R2 (Optional)
Quantity:								

GUIDE #3		L3	T	W2	S3	S4	S (SHCS Size)	R2 (Optional)
Quantity:								

STANDARD TOLERANCES		
L-L3	+0.000 -0.005	+0.00 -0.15
T	+0.000 -0.005	+0.00 -0.15
W-W2	+0.0000 -0.0003	+0.000 -0.007
S1-S6	±0.01	±0.2
	INCH	METRIC

Notes:  
 When ordering full sets of bars/guides, the "T" dimension should be equal on all items.  
 Screws will be on center of the bars and guides.  
 To order standard bars cut to length or bars or guides with pocket radii, please refer to page C-7 in the catalog.

E-MAIL TECH@PROCOMPS.COM		
CONTACT:	COMPANY NAME:	PHONE #:
REFERENCE #:	ACCOUNT #:	E-MAIL ADDRESS: